PMGCOMPANY

SPECIALISTS IN HEAT SHRINK TUBING AND CABLE HARNESSING PRODUCTS

PPS-WRAP

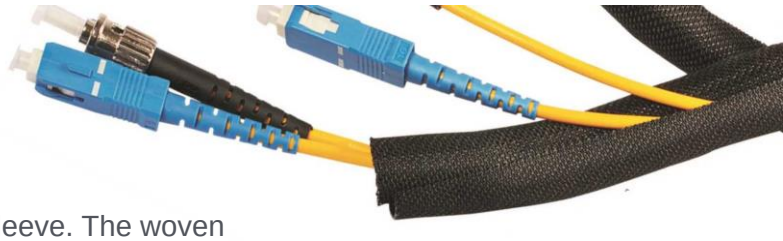

Polyester Wrap-around Braided Sleeving

PPS-WRAP is a flexible wrap-around protective sleeve. The woven construction provides flexibility, spring back and high resistance to abrasion. It is designed to protect wiring, cables, pipes, and hoses from mechanical degradation arising from exposure to challenging conditions in vibrating installations. PPS-WRAP is installed by opening the sleeve, feeding over the application and releasing.

General Information	
Material	Polyester (PET)
Monofilament size	0.22mm or 0.25mm
Operating temperature	-50°C to 150°C
Melt point	240°C ±10°C
Cutting tool	Hot Knife
Specifications	RoHS Halogen Free

RoHS COMPLIANT

Standard colors:, other colors available .upon request

BLACK

Features & Benefits

- Side entry (post termination) application.
- Ideal for the repair and re-routing of cables.
- Light weight and cost effective.
- Zero halogen and low fire hazard.

Applications

- Mechanical protection of wires in motor vehicles & trains.
- Used to minimize vibration of hoses and wire harnesses.
- Industrial applications where abrasion resistance and cut through protection is key.

Ordering Description	Nominal Internal Diameter (mm)	Maximum Bundle Diameter (mm)
PPS-WRAP-5	5.0	6.0
PPS-WRAP-9	9.0	10.0
PPS-WRAP-10	10.0	11.0
PPS-WRAP-13	13.0	14.0
PPS-WRAP-19	19.0	20.0
PPS-WRAP-25	25.0	27.0
PPS-WRAP-30	30.0	32.0
PPS-WRAP-50	50.0	52.0

Packaging options – Spools

Full details on technical specifications, test methods and values are available on request.

Tel: +44 (0)1793 840840
E-mail: sales@pmgcompanyonline.com
Web: www.pmgcompanyonline.com

PMGCOMPANY