


## PLT100(A)

Medium Wall Heat Shrinkable Polyolefin with optional adhesive liner

PLT100A is a Heavy wall tubing which is suitable for a wide range of telecom and low voltage power applications such as jointing and cable repair. PLT100A tubing combines a good level of electrical and physical protection. It is available with or without an adhesive liner.

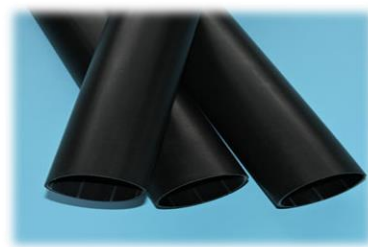

General Information	
Material Jacket	Polyolefin
Inner Liner	Polyamide
Shrink Ratio	> 3:1
Dielectric Strength	≥ 20 KV/mm
Installation Temperature	120°C
Specifications	RoHS Compliant



Standard Colour

**BLACK**

### Features & Benefits

- Rugged and hard warring
- Continuous operating temperature of -55°C to +110°C
- Adhesive lining provides a watertight seal
- Offer strain relief and mechanical protection.
- Excellent chemical and abrasion resistance

Ordering Description	Minimum ID Supplied (mm)	Maximum ID Recovered (mm)	Recovered Wall Thickness (mm)
PLM100A-9/3	9.0	3.0	2.50
PLM100A-12/4	10.0	4.0	2.50
PLM100A-16/5	16.0	5.0	2.60
PLM100A-20/6	20.0	6.0	2.80
PLM100A-30/8	30.0	8.0	3.20
PLM100A-40/12	40.0	12.0	4.00
PLM100A-55/16	55.0	16.0	4.10
PLM100A-65/19	65.0	19.0	4.20
PLM100A-80/22	80.0	22.0	4.20
PLM100A-100/30	100.0	30.0	4.40
PLM100A-120/34	120.0	34.0	4.40
PLM100A-140/37	140.0	37.0	4.50
PLM100A-160/50	160.0	50.0	4.50
PLM100A-180/60	180.0	60.0	4.50

Full details on technical specifications, test methods and values are available on request. Standard lengths 1m and 1.2m. Also available in 1.5m lengths as special order

Full details on technical specifications, test methods and values are available on request.

