




PLCE100A

HEAT SHRINKABLE POLYOLEFIN END CAPS

PLCE100A heat shrinkable cable end caps are commonly used to seal the ends of paper, plastic, or rubber insulated wires and cables. They are manufactured from a polyolefin material and internally lined with a hot-melt adhesive to provide a watertight seal against the damage caused by the ingress of water, dirt or other corrosive materials.

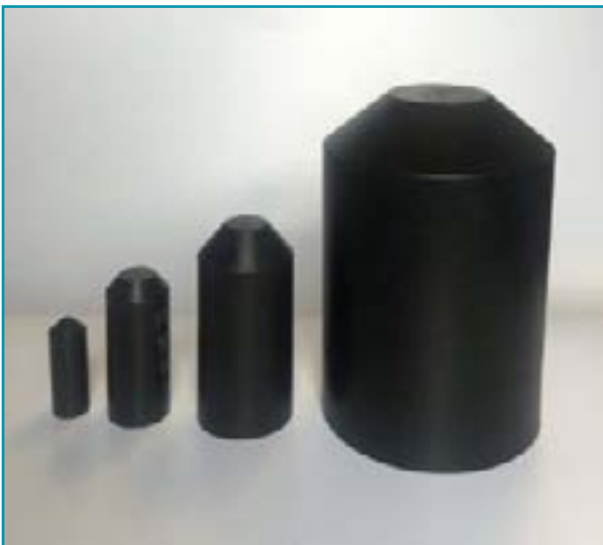

TECHNICAL DATA

HEAT SHRINKABLE POLYOLEFIN END CAPS

Material	Polyolefin
Inner Liner	Polyamide
Shrink Ratio	>2:1
Dielectric Strength	12 KV/mm
Installation Temperature	125° C
Specifications	RoHS Compliant

PLCE100A will provide a seal up to 0.05 Mpa internal press and the rugged wall of these end caps also offers excellent resistance against abrasion and cut through.

BENEFITS

- Rugged and hard wearing.
- Continuous operating temperature of -55°C to + 110°C.
- Adhesive lining provides a watertight seal.
- Offers strain relief and mechanical protection.
- Excellent chemical and abrasion resistance.

Ordering Description	Minimum ID Supplied (mm)	Maximum ID Recovered (mm)	Recovered Wall Thickness (mm)
PLCE100A-10/4	10.0	4.0	2.0
PLCE100A-14/4	14.0	4.0	2.0
PLCE100A-25/8	25.0	8.0	2.3
PLCE100A-35/15	35.0	15.0	3.0
PLCE100A-55/25	55.0	25.0	3.3
PLCE100A-75/35	75.0	35.0	3.3
PLCE100A-100/50	100.0	50.0	4.0

QUALITY ASSURANCE

PMG Company promises to always strive to offer our customers quality assurance. We aim to provide consistent and exceptional levels of customer service. This is achieved by our experienced sales and logistics teams. Quality assurance is our way of preventing mistakes and avoiding problems when delivering products to our customers. The high quality products we supply also conform to internationally recognised product specifications and standards.