


# PMGCOMPANY

SPECIALISTS IN HEAT SHRINK TUBING AND CABLE HARNESSING PRODUCTS

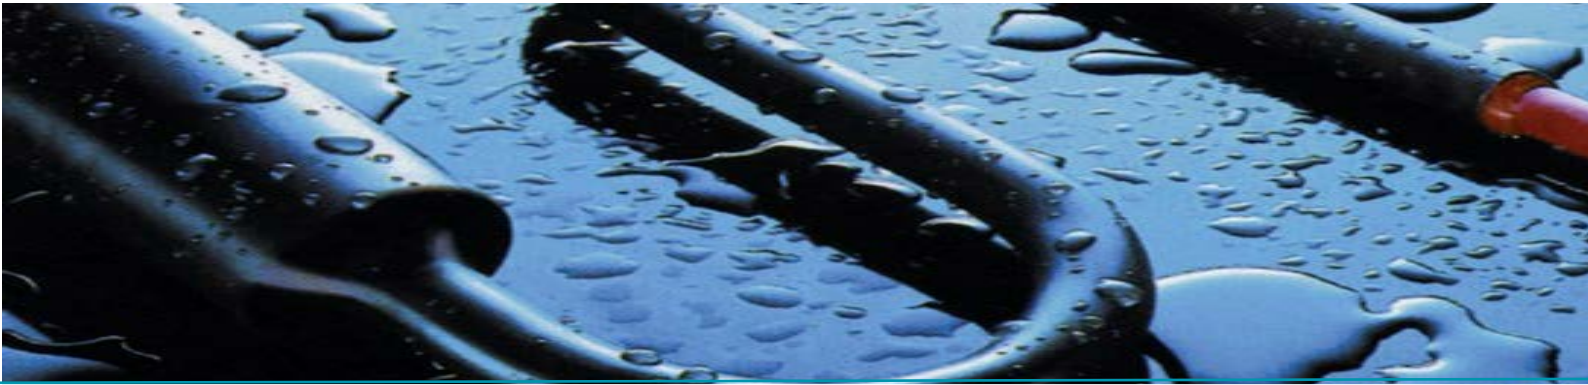

## PLF106

HIGH SHRINK RATIO TUBING WITH OPTIONAL ADHESIVE LINER

PLF106 is ideal for applications where there is a large dimensional difference between the cables, connectors and components. The 6:1 shrink ratio allows for a close fit to a variety of irregular substrates. PLF106 provides excellent mechanical protection to cable joints and terminations, complete environmental protection and resistance to impact abrasion.



### TECHNICAL DATA

SUPERIOR GRADE FLAME RETARDANT POLYOLEFIN

Material	Polyolefin
Shrink Ratio	6:1
Operating Temperature	-55 °C to 110°C
Dielectric Strength	20 KV/mm
Installation Temperature	90°C to 120°C
Specifications	RoHS Compliant

### APPLICATIONS

- Electrical insulation of wires and cables.
- Protection against abrasion and chemicals.
- Wire bundling and splice protection.
- Cable identification.

## BENEFITS

- High shrink ratio.
- Excellent electrical, chemical and physical properties.
- Easy to install.
- Available in a wide range of colours.

Ordering Description	Minimum ID Supplied (mm)	Maximum ID Recovered (mm)	Recovered Wall Thickness (mm)
PLF-106-19/3	19.00	3.2	3.2
PLF-106-33/5	33.00	5.5	3.4
PLF-106-44/7	44.00	7.4	3.6
PLF-106-51/8	51.00	8.3	4.3
PLF-106-70/12	70.00	11.7	4.8
PLF-106-89/17	89.00	17.1	4.8
PLF-106-119/23	119.00	22.7	4.8

## QUALITY ASSURANCE

PMG Company promises to always strive to offer our customers quality assurance. We aim to provide consistent and exceptional levels of customer service. This is achieved by our experienced sales and logistics teams. Quality assurance is our way of preventing mistakes and avoiding problems when delivering products to our customers. The high quality products we supply also conform to internationally recognised product specifications and standards.